


SERIE 20 / ANCHO 200MM

ABRAZADERA ABRIBLE COMPLETAMENTE

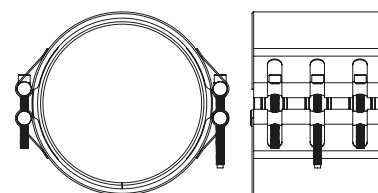

REFERENCIA [ref.]	RANGO		ANCHO [mm]	PRESIÓN		PESO [Kg]	PAR DE APRIETE	
	Min [mm]	Max [mm]		[bar]	[psi]		[N-m]	[lbf-ft]
20-04A	148	160	200	19	276	5,80	35	26
20-04B	158	170	200	19	276	5,80	35	26
20-05A	168	180	200	17	247	6,00	40	30
20-05B	178	190	200	17	247	6,00	40	30
20-06A	188	200	200	15	218	6,20	40	30
20-06B	198	210	200	15	218	6,20	40	30
20-07A	208	220	200	14	203	6,30	40	30
20-07B	218	230	200	14	203	6,30	40	30
20-08A	228	240	200	13	189	6,50	45	33
20-08B	238	250	200	13	189	6,50	45	33
20-09A	248	260	200	12	174	6,70	45	33
20-09B	258	270	200	12	174	6,70	45	33
20-10A	268	280	200	11	160	7,00	45	33
20-10B	278	290	200	11	160	7,00	45	33
20-11A	288	300	200	15	218	8,50	45	33
20-11B	298	310	200	15	218	8,50	45	33
20-12A	308	320	200	15	218	8,70	50	37
20-12B	318	330	200	15	218	8,70	50	37
20-13A	328	340	200	14	203	8,90	50	37
20-13B	338	350	200	14	203	8,90	50	37
20-14A	348	360	200	13	189	9,20	50	37
20-14B	358	370	200	13	189	9,20	50	37
20-15A	368	380	200	12	174	9,40	55	41
20-15B	378	390	200	12	174	9,40	55	41
20-16A	388	400	200	12	174	9,80	55	41
20-16B	398	410	200	12	174	9,80	55	41
20-17A	408	420	200	11	160	10,20	55	41
20-17B	418	430	200	11	160	10,20	55	41
20-18A	428	440	200	11	160	10,40	60	44
20-18B	438	450	200	11	160	10,40	60	44
20-19A	448	460	200	10	145	10,80	60	44
20-19B	458	470	200	10	145	10,80	60	44
20-20A	468	480	200	13	189	12,40	60	44
20-20B	478	490	200	13	189	12,40	60	44
20-21A	488	500	200	13	189	12,60	60	44
20-21B	498	510	200	13	189	12,60	60	44
20-22A	508	520	200	12	174	12,90	65	48
20-22B	518	530	200	12	174	12,90	65	48
20-23A	528	540	200	12	174	13,40	65	48
20-23B	538	550	200	12	174	13,40	65	48
20-24A	548	560	200	11	160	13,60	65	48
20-24B	558	570	200	11	160	13,60	65	48
20-25A	568	580	200	11	160	13,90	70	52
20-25B	578	590	200	11	160	13,90	70	52
20-26A	588	600	200	10	145	14,30	70	52
20-26B	598	610	200	10	145	14,30	70	52
20-27A	608	620	200	10	145	14,60	70	52
20-27B	618	630	200	10	145	14,60	70	52
20-28A	628	640	200	12	174	17,00	75	55
20-28B	638	650	200	12	174	17,00	75	55
20-29A	648	660	200	12	174	17,50	75	55
20-29B	658	670	200	12	174	17,50	75	55
20-30A	668	680	200	12	174	17,70	75	55
20-30B	678	690	200	12	174	17,70	75	55
20-31A	688	700	200	11	160	18,00	75	55
20-31B	698	710	200	11	160	18,00	75	55
20-32A	708	720	200	11	160	19,20	80	59
20-32B	718	730	200	11	160	19,20	80	59
20-33A	728	740	200	11	160	19,70	80	59
20-33B	738	750	200	11	160	19,70	80	59
20-34A	748	760	200	10	145	20,10	80	59

REFERENCIA [ref.]	RANGO		ANCHO [mm]	PRESIÓN		PESO [Kg]	PAR DE APRIETE	
	Min [mm]	Max [mm]		[bar]	[psi]		[N-m]	[lbf-ft]
20-34B	758	770	200	10	145	20,10	80	59
20-35A	768	780	200	10	145	20,40	85	63
20-35B	778	790	200	10	145	20,40	85	63
20-36A	788	800	200	12	174	21,70	100	74
20-36B	798	810	200	12	174	21,70	100	74
20-37A	808	820	200	12	174	22,40	100	74
20-37B	818	830	200	12	174	22,40	100	74
20-38A	828	840	200	11	160	22,90	100	74
20-38B	838	850	200	11	160	22,90	100	74
20-39A	848	860	200	11	160	23,10	100	74
20-39B	858	870	200	11	160	23,10	100	74
20-40A	868	880	200	11	160	24,10	115	85
20-40B	878	890	200	11	160	24,10	115	85
20-41A	888	900	200	11	160	24,30	120	89
20-41B	898	910	200	11	160	24,30	120	89
20-42A	908	920	200	10	145	24,80	120	89
20-42B	918	930	200	10	145	24,80	120	89
20-43A	928	940	200	10	145	25,20	125	92
20-43B	938	950	200	10	145	25,20	125	92
20-44A	948	960	200	13	189	25,80	125	92
20-44B	958	970	200	13	189	25,80	125	92
20-45A	968	980	200	13	189	26,00	125	92
20-45B	978	990	200	13	189	26,00	125	92
20-46A	988	1000	200	13	189	26,50	130	96
20-46B	998	1010	200	13	189	26,50	130	96
20-47A	1008	1020	200	12	174	26,90	130	96
20-47B	1018	1030	200	12	174	26,90	130	96
20-48A	1028	1040	200	12	174	27,30	135	100
20-48B	1038	1050	200	12	174	27,30	135	100
20-49A	1048	1060	200	12	174	27,70	135	100
20-49B	1058	1070	200	12	174	27,70	135	100
20-50A	1068	1080	200	12	174	28,20	135	100
20-50B	1078	1090	200	12	174	28,20	135	100
20-51A	1088	1100	200	12	174	34,90	140	103
20-51B	1098	1110	200	12	174	34,90	140	103
20-52A	1108	1120	200	11	160	35,90	140	103
20-52B	1118	1130	200	11	160	35,90	140	103
20-53A	1128	1140	200	11	160	36,10	145	107
20-53B	1138	1150	200	11	160	36,10	145	107
20-54A	1148	1160	200	11	160	36,50	145	107
20-54B	1158	1170	200	11	160	36,50	145	107
20-55A	1168	1180	200	11	160	37,40	145	107
20-55B	1178	1190	200	11	160	37,40	145	107
20-56A	1188	1200	200	11	160	37,80	150	111
20-56B	1198	1210	200	11	160	37,80	150	111
20-57A	1208	1220	200	10	145	38,20	150	111
20-57B	1218	1230	200	10	145	38,20	150	111
20-58A	1228	1240	200	10	145	38,70	150	111
20-58B	1238	1250	200	10	145	38,70	150	111
20-59A	1248	1260	200	10	145	39,20	155	114
20-59B	1258	1270	200	10	145	39,20	155	114
20-60A	1268	1280	200	12	174	39,80	155	114
20-60B	1278	1290	200	12	174	39,80	155	114
20-61A	1288	1300	200	12	174	40,30	160	118
20-61B	1298	1310	200	12	174	40,30	160	118
20-62A	1308	1320	200	12	174	40,90	160	118
20-62B	1318	1330	200	12	174	40,90	160	118
20-63A	1328	1340	200	12	174	41,60	160	118
20-63B	1338	1350	200	12	174	41,60	160	118
20-64A	1348	1360	200	12	174	42,20	165	122
20-64B	1358	1370	200	12	174	42,20	165	122